

IMPORTANT - PLEASE READ

◆ POWER - AUTO OFF


The SK PRO has a special feature called AUTO POWER OFF which automatically turns the power to the instrument “OFF” if no keys or buttons are pressed for 30 minutes. This is done for safety reasons and under most normal conditions we do not recommend disabling this feature; however, you can select whether or not the instrument will automatically turn “OFF” by doing the following procedure:

1. From any of the PLAY Mode Pages, press the MENU/EXIT button. The Information Center Display should now look like this:




The “COMBINATION” box should be highlighted.


2. Press the PAGE “▶” button two times to highlight the “SOUND” box.

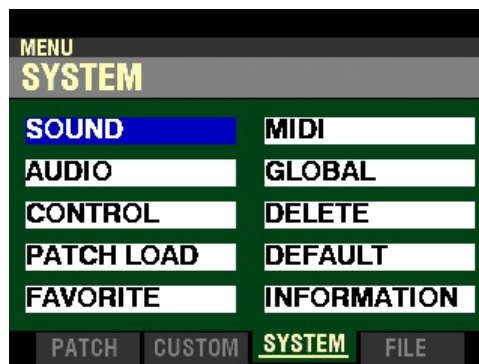


3. Press the DIRECTION “▶” button once. The Information Center Display should now look like this:

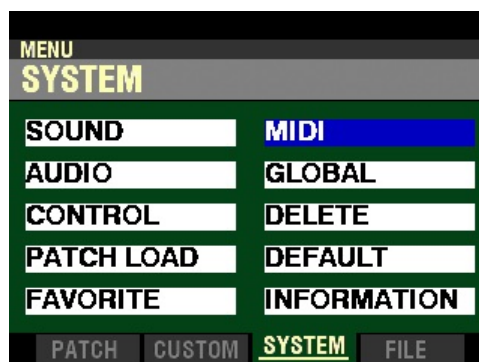

4. Press the DIRECTION “▼” button once. The Information Center Display should now look like this:

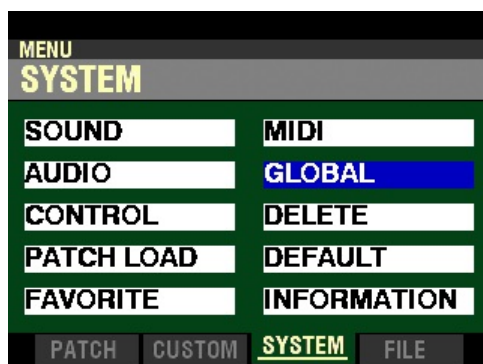

5. Press the ENTER button. The Information Center Display should now look like this:

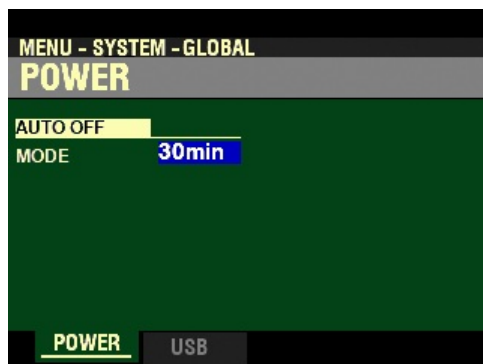

The data chart below shows the options you can select.

POWER - AUTO OFF	
Description	Function
30min	The AC power to the instrument will turn “OFF” after 30 minutes have elapsed with no keys or buttons being pressed.
Disable	The instrument will turn “ON” or “OFF” with the AC Power Switch, but not turn “OFF” automatically.

Turn the VALUE knob to make your selection.


◆ Recording a System Setup

The previous pages explain how to disable the AUTO POWER OFF feature of your SX PRO. This feature will be disabled as long as the power to the instrument is “ON.” However, if you turn the instrument “OFF.” then “ON” again, your setting will not be remembered.

You can Record a Custom Setup in which this feature is set to Disable and will remain so even if the power is turned “OFF.” In this way, you will not have continually to edit this feature each time the instrument is turned “ON.”

To Record a Custom Setup with AUTO POWER ON set to Disable, do the following:



1. Follow the steps on the previous two pages to set the AUTO POWER OFF feature to Disable.

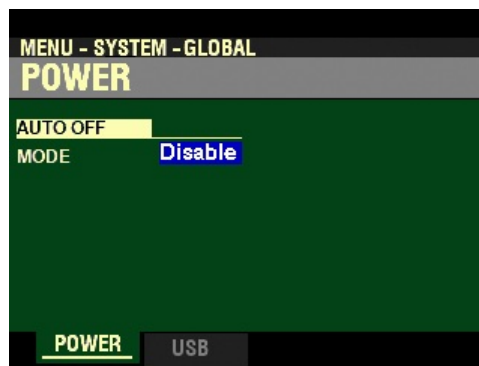

2. From the screen shown above, press the red RECORD button. The Information Center Display should now look like this:



3. Press the ENTER button to complete the Recording procedure. You will see the following messages flash in the display for approximately 1 second each:

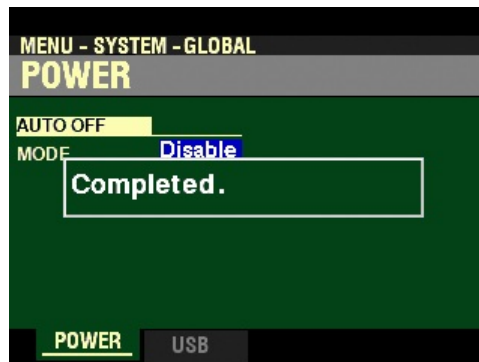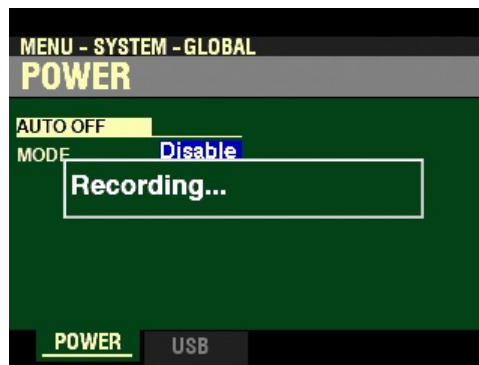

After the “Completed” message disappears, the POWER FUNCTION Mode Page will display.

4. Press the PLAY button to return to the PLAY Mode.